


Angle Sillcock Valves

125 lb. CWP to 100 ° F


Maximum Temperature 180 ° F

CSA B125 Approved and IAPMO Listed

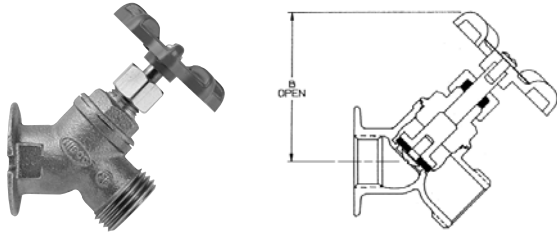


63-CL

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		B		
Angle Sillcock FIP to Hose	1/2"	2 ¹ / ₂ "		.50 lb
	3/4"	2 ¹ / ₂ "		.53 lb

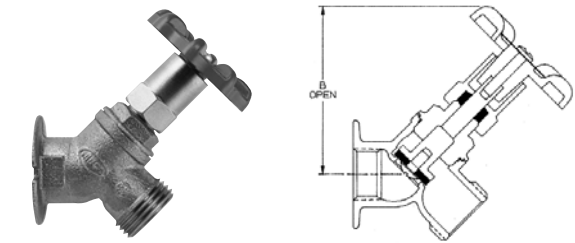


63-CL-LS

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		B		
Angle Sillcock FIP to Hose with Lockshield	1/2"	2 ¹³ / ₁₆ "		.60 LB
	3/4"	2 ¹³ / ₁₆ "		.64 LB

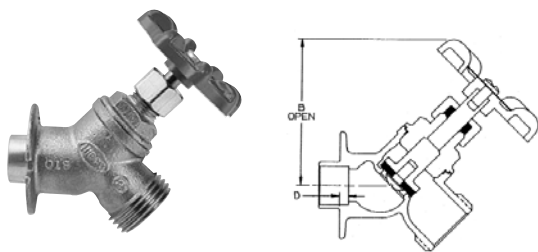


763-CL

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		B	D	
Angle Sillcock Cup to Hose	1/2"	2 ¹³ / ₁₆ "	5/32"	.53 lb
	3/4"	2 ¹³ / ₁₆ "	9/32"	.57 lb

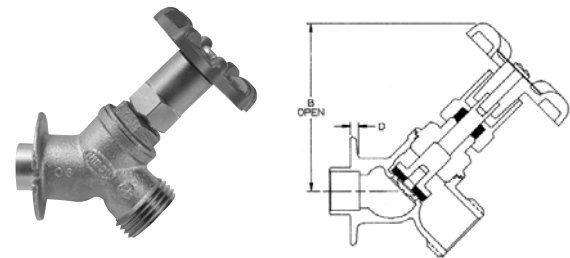

763-CL-LS

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		B	D	
Angle Sillcock Cup to Hose with Lockshield	1/2"	2 ¹³ / ₁₆ "	5/32"	.63 lb
	3/4"	2 ¹³ / ₁₆ "	9/32"	.67 lb

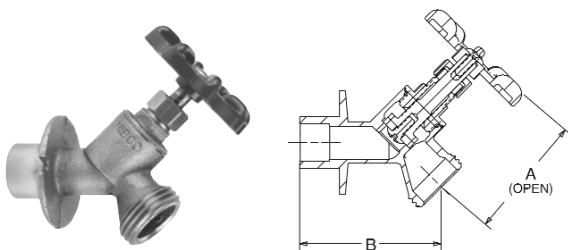

C763-1†

DESCRIPTION	NOM. SIZE	DIMENSIONS		APPROX. NET WT.
		A	B	
Angle Sillcock 1/2" or 3/4" Fitting to Cup	1/2" or 3/4"	2 ⁷ / ₁₆ "	2 ¹ / ₄ "	.4 lb

† - Not CSA approved or IAPMO listed

